



1) Lock on thermal bridge profile




2) End-milling

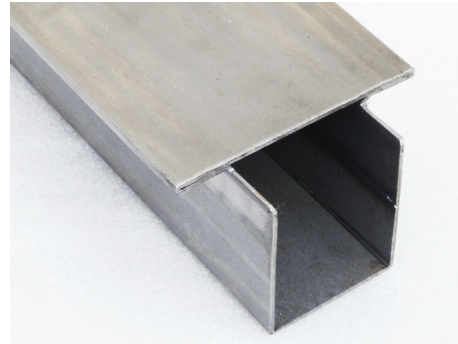


3) Window handle

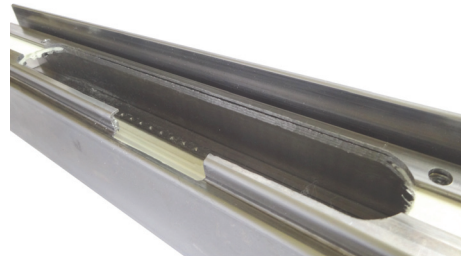


4) Electrical lock

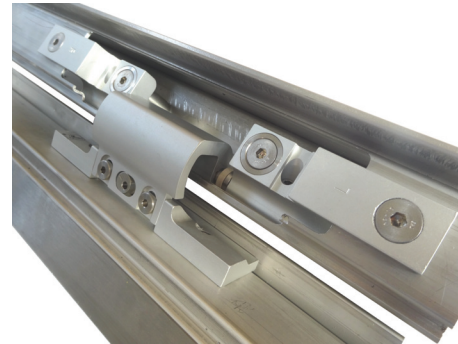

5) Foldaway hinge

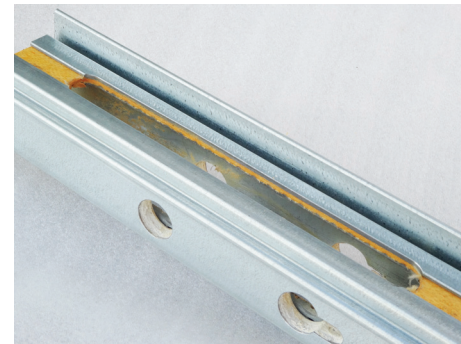


6) Lock on fire-resistant profile

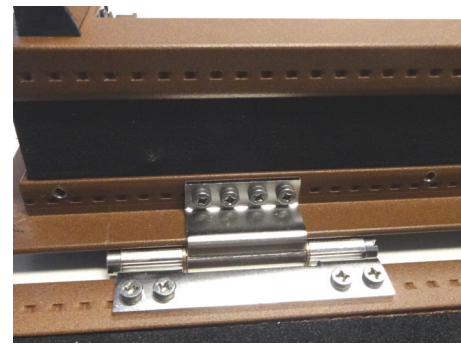

7) Hinge



8) Hinge on fire-resistant profile

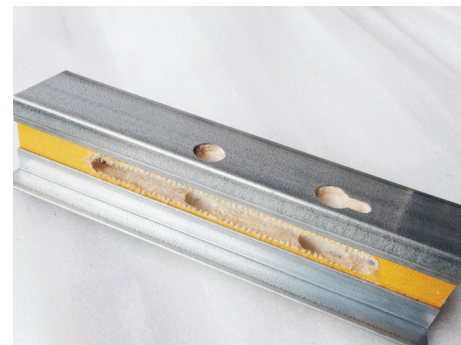


9) Lock on fire-resistant profile

Copy router for steel and stainless steel profiles

Conceived to carry out a wide range of milling operations on doors and windows profiles (see examples on the reverse).

Linear rail guides (A, axis x and y) are fixed on a strong cast iron support (B), which enables the operator to work in a very stable way and without vibrations.




Wide range of copy templates and counter shapes meant for different kinds of profile.

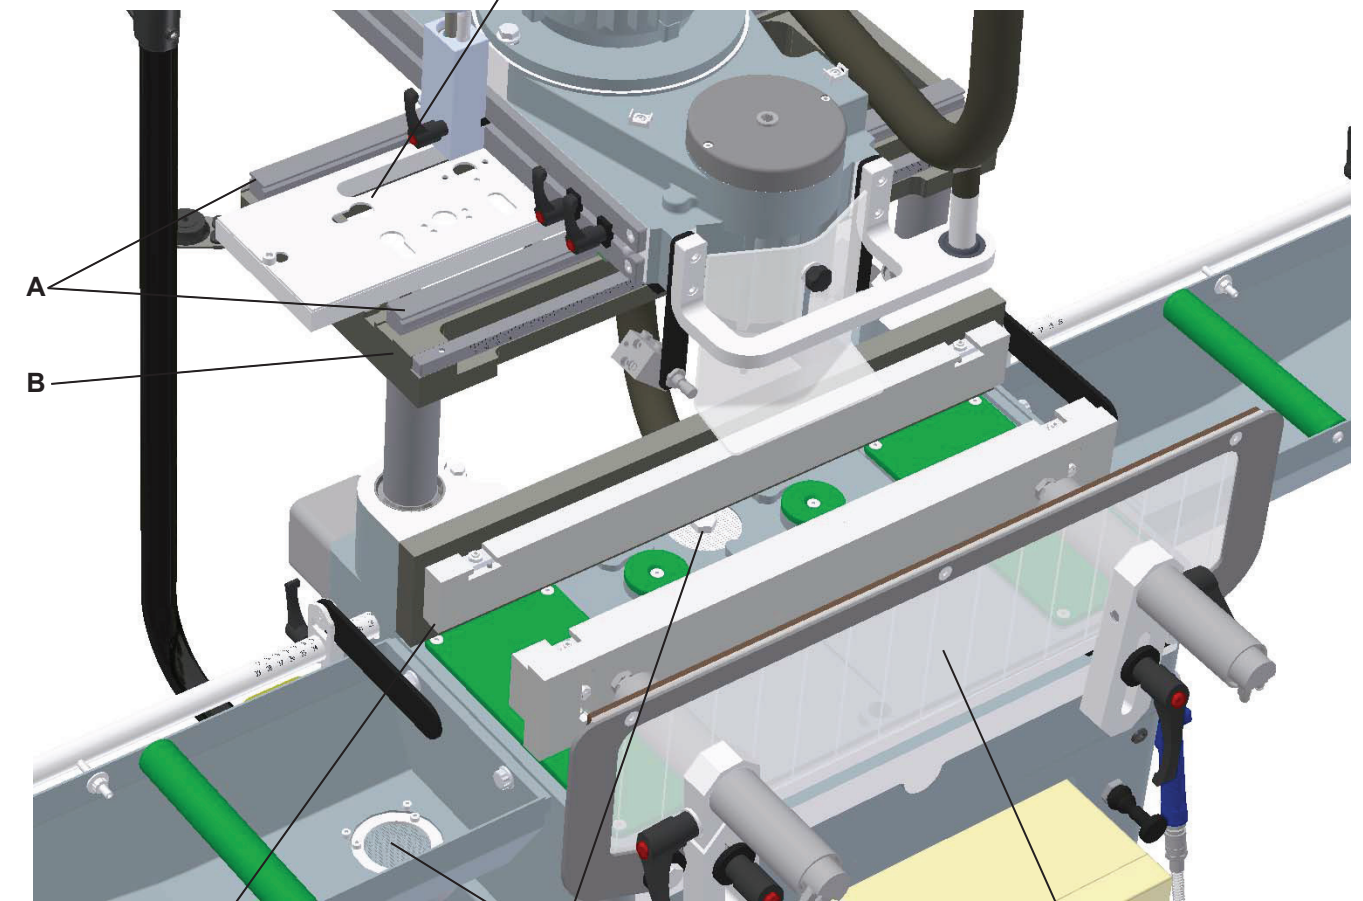

The main feature of the clamping system is represented by customized counter shapes that firmly secure the profile to the working table without any vibrations. The counter shape change is extremely fast thanks to the easy reverse system.

Coolant recovery openings filter the liquid and convey it back to the tank.

Plastic strips avoid the coolant dripping on the outside: the liquid is conveyed back onto the working table and then into the coolant recovery system.




3+T+N
400Volt



6÷8Bar



210
kg



The Company reserves the right to amend and improve its products without notice.

Vertical descent stop button:
only the right lever must be
moved while milling.

Double mist sprayer to work steel profiles.
If you work stainless steel profiles, the machine
must be equipped with one mist sprayer and
one (-10°C) cold air gun (optional).
Both systems are set in motion simultaneously
at the start of the motor.

6+6 foldaway stops on the lateral supports
in 3 available lengths: 1m/2m/2,5m.

8 vertical descent
stops on the revolver.

Push button of the four-diameters
pneumatic copy pin (5-6-8-10).

Optional cold air gun:
set at -10°C (It can reach -20°C).



Variator of the motor rotation speed:
you can choose the perfect speed according
to material and tool.
Different kinds of tool are supplied for
different kinds of work.
The motor is equipped with a thermic feeler
that stops the feeding in case of overheating,
protecting the integrity of the motor itself.

Functioning:

- 1) The profile is clamped at low pressure;
- 2) By pushing simultaneously the pneumatic buttons placed on the handles of the right and left levers, the high pressure clamping is activated and the mist sprayers and vertical motor are set in motion. The bimanual control devices are certified and comply with the safety regulations in force (EN574-3A).

