



SCA Mini
Single head cutting-off machine

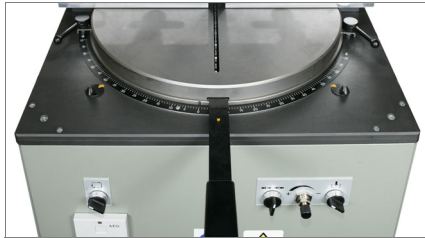


Control 01

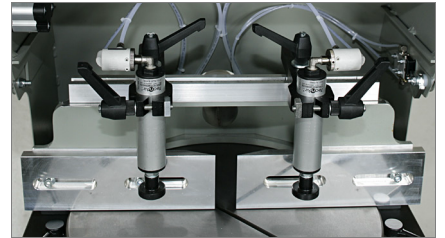


Clamps 02



Single head, rising blade cutting-off machine, with left loading side, for cutting at angular settings from 20° to the left to 20° to the right as intermediate angles. Available with pneumatic blade feed.

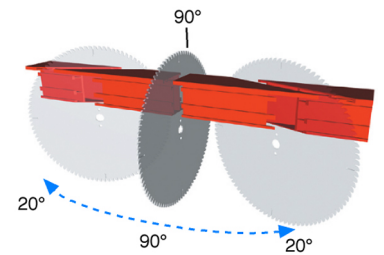

Cutting zone 03



Swarf drawer 04



SCA Mini

Single head cutting-off machine

01 Control

The control console allows user-friendly machine operation. The practical lever with scale serves for rapid angular positioning of the blade. Instead a further adjusting system allows adjusting the clamp pressure and blade outfeed rate

02 Clamps


Thanks to the technical solutions adopted, the horizontal and vertical clamps ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the clamps. Such characteristic allows use of this machine in window/door manufacture.

03 Cutting zone

The rugged work table associated with the vertical fence allows optimum positioning of the workpiece, thus ensuring considerable accuracy of the cut surface.

04 Swarf drawer

A practical swarf drawer allows efficient collection of the swarf thus ensuring clean conditions of the machine and work area.

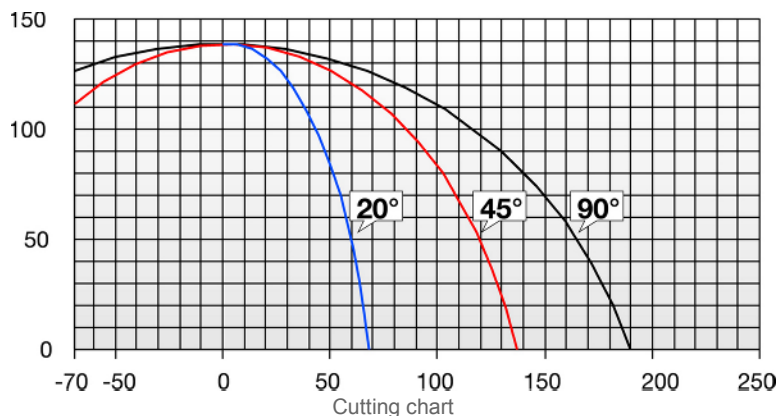

BLADE	
Carbide-tipped blade dia. (mm)	400
BLADE FEED	
Hydro-pneumatic (SCA MINI pneumatica)	
Manual (SCA MINI manuale)	
CUTTING ZONE GUARDS	
Full guard, manually operated	
LUBRICATION SYSTEM	
Spray-mist lubrication with oil emulsion	
CLAMPS	
Vertical pneumatic clamps	2
MOTOR	
Three-phase motor (2800 rpm) (without brake) (kW)	1,5